



TerraMai's Dark Horse Flooring & Paneling makes it easy to always bet on black. This product line was created from black horse fencing reclaimed from the American South, where horse breeding and racing remain a passionate tradition.

Allowed Application Areas

INTERIOR			EXTERIOR	
Floors	Walls	Ceilings	Siding	Decking
Yes	Yes	Yes	No	No

Approved Installation Methods

- Nail/Staple/Cleat
- Glue & Nail (100% moisture-curing polyurethane or silane-modified polymer - AXIOS or MS-Polymer)

Acclimation

The planks should be stored in a clean, dry, controlled environment between 60°F (16°C) and 80°F (27°C) and 35% to 55% RH, until the wood has achieved equilibrium moisture content. See the [TerraMai Flooring/Paneling Acclimation Instructions](#) for further information.

Options

Class A Flame Retardant

Profile

S3S - T&G, Square Edge, Back Relieved




TERRAMAI

EQUESTRIAN RED & WHITE OAK *SOLID* FLOORING & PANELING

Wood is a natural material. Variation in color and grain pattern are to be expected.
For more information or to place an order, please contact your [local TerraMai Rep.](#)



SKU	532
Finish Option	Black Oil - Skip Planed
Face Width	4-1/2" (114mm)

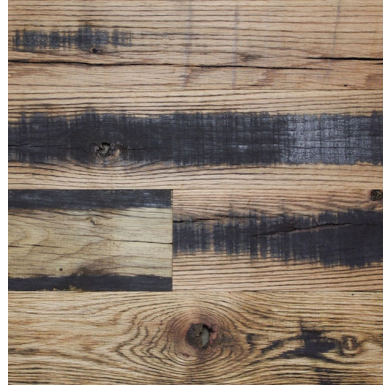

SKU	699
Finish Option	Clear Oil - Skip Planed
Face Width	4-1/2" (114mm)

Species	<i>Quercus rubra & Quercus alba</i>
Source	Black horse fencing reclaimed from the American South
Character	May include weathered black water-based and/or oil-based paint, occasional unfilled nail and other holes, insect scarring, frequent checking, tight, loose and missing knots and other signs of prior history and use.
Finish*	Zero-VOC clear oil, low-VOC polyurethane, or unfinished
Thickness	5/8" (16mm)
Width	4-1/2" (114mm)
Lengths	1' - 7' (305mm - 2133mm)
Construction	Solid
Wear Layer	1/4" (6mm)
# of Backer Plies	N/A
Filler	No
Janka/Hardness	1,220-1,350 lbs (5.4 - 6 kN)
Moisture Content	6%-9%
Knots	Frequent checking, tight, loose and missing knots and other signs of prior history and use.
Nail Holes	Occasional unfilled nail and other holes & insect scarring
Saw Marks	Yes
Grain	Mixed Grain
Density	44 - 47 lbs/ft ³ (704.8 - 752.9 kg/m ³)
Packaging	Palletized

*Custom finishes available.

For more information on installation guidelines, please visit TerraMai.com and see [Flooring Installation Instructions](#) or [Paneling Installation Instructions](#).

CERTIFICATIONS



FSC Recycled 100% - FSC-C021798

CONTRIBUTES TO TO LEED® V4

EQ Credit: Low-Emitting Materials - Flooring
(1-3 Points)

MR Credit: Building Life-Cycle Impact Reduction, Option 3
(2-5 Points)