



### BEAUTY & SPEED:

- FAST & SIMPLE INSTALLATION - Prefabricated modular panels allow the installation team to quickly complete jobs
- MULTIPLE STYLES - Plank, 3D Cube, 3D Stick, Chevron, Slats, and Board & Batten.
- CUSTOM CAPABILITIES - Our in-house craftspeople and state of the art equipment will bring your vision to life

Create spaces of unsurpassed beauty and character with TerraMai Modular Panels; reclaimed and sustainable wood on an FSC-certified plywood backer. Installation is quick, easy, and stays true to your design intent. Our modular panels will dramatically reduce your installation time for faster project completion.

### Approved Application Areas

INTERIOR			EXTERIOR	
Floors	Walls	Ceilings	Siding	Decking
No	Yes	Yes	No	No

### Approved Installation Methods

- Z-Clip (Walls)
- Adhesive with nailing (Walls)
- Approved mechanical fasteners connecting to structural members (Ceilings - Consult local building code)

### Acclimation


TerraMai Modular Panels are constructed of natural, reclaimed wood assembled on ½” thick birch plywood. The panels should be stored in a clean, dry, controlled environment between 60°F (16°C) and 80°F (27°C) and 35% to 55% RH, until the wood moisture content has achieved equilibrium.

### Options

Class A Flame Retardant

# TERRAMAI

## CHEVRON MODULAR PANELS

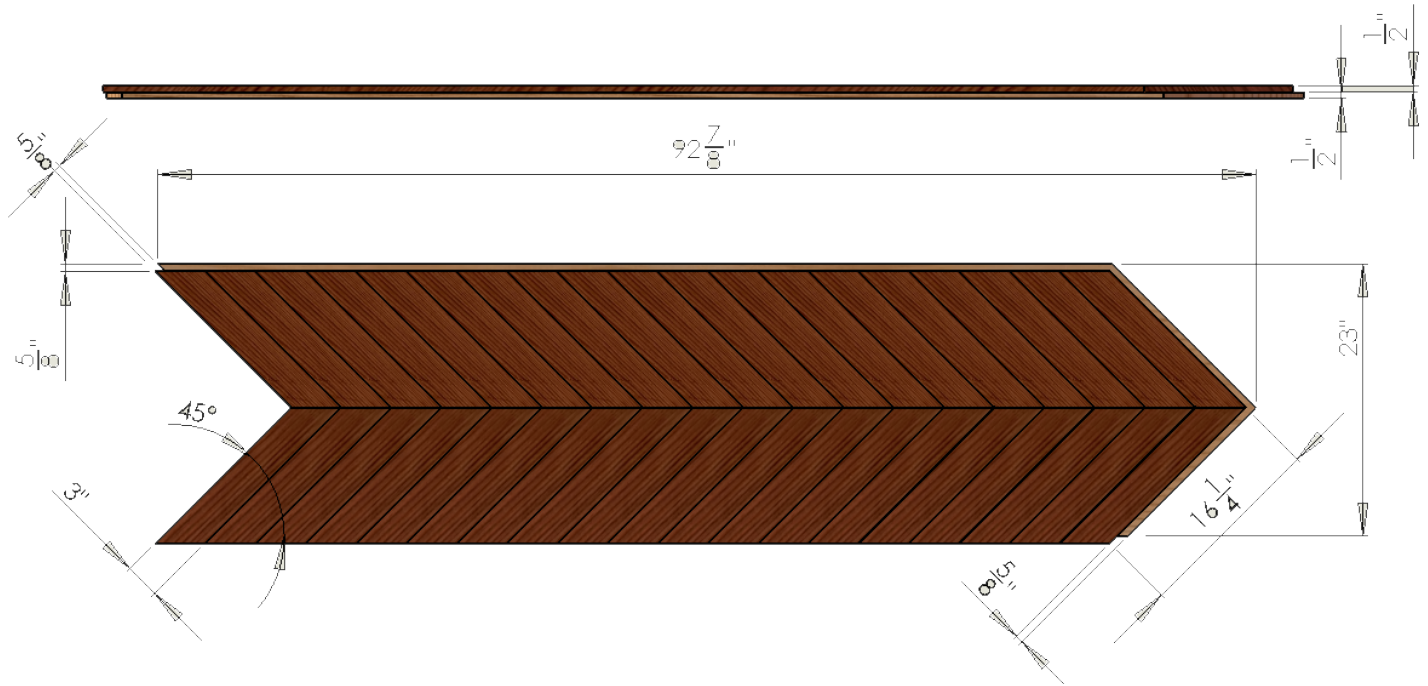

		Doug Fir	Red Oak	White Oak	Lost Coast Redwood
Total panel Weight	(lbs)	43	51	53	40
	(kg)	20	23	24	18
Weight per Area	(lbs/ft <sup>2</sup> )	2.9	3.5	3.6	2.7
	(kg/m <sup>2</sup> )	14	17	18	13
FSC % Mix	FSC C021798	50%	100%	100%	100%
LEED v4 Contribution	EQ Credit - Low-Emitting Materials	Yes	Yes	Yes	Yes
	MR Credit - Recycled Content	No	Yes	Yes	Yes

Wood is a natural material, and color and grain patterns will vary from piece to piece.

Visit [TerraMai.com](https://www.terramai.com) for information on Modular Panels Installation Instructions and other modular panel configuration options.

### SKU

Species	Unfinished	Prefinished*
Doug Fir	1101	1125
Oak, Red	1102	1127
Oak, White	1103	1128
Lost Coast Redwood	1087	1126

\*Oil or Polyurethane to be specified on order. Customer finishes are available.

Available Species*	Doug Fir, Oak (Red and White), Redwood (Lost Coast)
Finish Options*	Zero-VOC clear oil, low-VOC polyurethane, or unfinished
Panel Thickness*	1" (25mm)
Width*	23" (584mm)
Lengths*	92-7/8" (2359mm)
Construction*	1/2" thick boards installed on 1/2" FSC Certified plywood
Plywood	1/2" FSC Certified 5-ply Birch plywood
Moisture Content	6-8%
Packaging	Crated
Installation on Walls	Glue & nail or Z-Clip
Ceiling Installation**	Approved mechanical fasteners attaching to structural members
Samples*	4-1/2" x 8-3/8" in Lost Coast Redwood

\*Custom finishes, sizes and species available.

\*\* Consult engineer with working knowledge of local building codes