



A classic example of what TerraMai does best - great looking, soulful reclaimed wood products designed and built for high-volume commercial projects. Perfect for residential and smaller commercial projects as well. We call this flooring & paneling 'Mission Oak' not only to evoke the reverential use of oak during America's Mission and Craftsman eras, but also to reference TerraMai's mission to turn neglected wood into unique, high-performance products developed for the most sophisticated design projects.

Allowed Application Areas

| INTERIOR | | | EXTERIOR | |
|----------|-------|----------|----------|---------|
| Floors | Walls | Ceilings | Siding | Decking |
| No | Yes | Yes | No | No |

Approved Installation Methods

- Nail/Staple/Cleat
- Glue (100% moisture-curing polyurethane or silane-modified polymer - AXIOS or MS-Polymer)

Acclimation

The planks should be stored in a clean, dry, controlled environment between 60°F (16°C) and 80°F (27°C) and 35% to 55% RH, until the wood has achieved equilibrium moisture content. See the [TerraMai Flooring/Paneling Acclimation Instructions](#) for further information.

Options

Class A Flame Retardant

Profile


Shiplap 2.0, Square Edge



TERRAMAI

MISSION RED OAK SHIPLAP 2.0 *SOLID* PANELING

Wood is a natural material. Variation in color and grain pattern are to be expected.
For more information or to place an order, please contact your [local TerraMai Rep.](#)

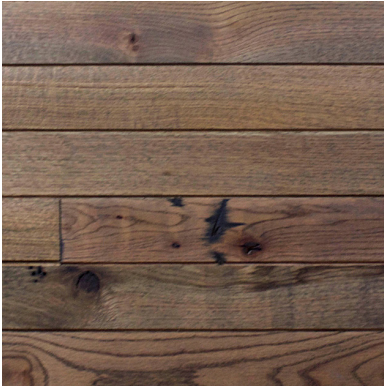

| | |
|----------------------|-----------|
| SKU | 826 |
| Finish Option | Dark Oil |
| Face Width | 3" (76mm) |



| | |
|----------------------|-----------|
| SKU | 827 |
| Finish Option | White Oil |
| Face Width | 3" (76mm) |

| | |
|-------------------|--|
| Species | <i>Quercus rubra</i> |
| Source | Reclaimed red oak from industrial shipping dunnage in the eastern U.S. |
| Character | Occasional nail and other fastener holes, surface seasoning checks, sound and missing knots, and other signs of prior history and age. |
| Finish* | Zero-VOC clear oil, low-VOC polyurethane, or unfinished |
| Thickness | 1/2" (13mm) |
| Width | 3" (76mm) |
| Lengths | 1' - 9' (305mm - 2743mm) |
| Construction | Solid |
| Wear Layer | N/A |
| # of Backer Plies | N/A |
| Filler | No |
| Janka/Hardness | 1,220 lbs (5.4 kN) |
| Moisture Content | 6%-9% |
| Knots | Prefilled surface checks and sound tight knots of all sizes and other signs of prior history and use. |
| Nail Holes | Occasional prefilled nail and other holes |
| Saw Marks | No |
| Grain | Mixed Grain |
| Density | 44 lbs/ft ³ (704.8 kg/m ³) |
| Packaging | Palletized |

*Custom finishes available.

For more information on installation guidelines, please visit TerraMai.com and see [Flooring Installation Instructions](#) or [Paneling Installation Instructions](#).

CERTIFICATIONS



FSC Recycled 100% - FSC-C021798



HPD Certified



VOC Reduction - Feature 4
Toxic Material Reduction - Feature 25

CONTRIBUTES TO LEED® V4

EQ Credit: Low-Emitting Materials - Flooring
(1-3 Points)

MR Credit: Building Life-Cycle Impact Reduction, Option 3
(2-5 Points)