

Reclaimed teak from Southeast Asia with an authentic weathered patina from decades of tropical seasoning and use. This is an incredible product, beautiful for floors, feature walls and other standard or custom paneling applications.

#### Allowed Application Areas

INTERIOR			EXTERIOR	
Floors	Walls	Ceilings	Siding	Decking
Yes	Yes	Yes	No	No

#### Approved Installation Methods

- Nail/Staple/Cleat
- Glue & Nail (100% moisture-curing polyurethane or silane-modified polymer - AXIOS or MS-Polymer)

#### Acclimation

The planks should be stored in a clean, dry, controlled environment between 60°F (16°C) and 80°F (27°C) and 35% to 55% RH, until the wood has achieved equilibrium moisture content. See the [TerraMai Flooring/Paneling Acclimation Instructions](#) for further information.

#### Options

Class A Flame Retardant

#### Profile

T&G, Square Edge, End Matched



# TERRAMAI

NAKED TEAK  
ENGINEERED  
FLOORING & PANELING


Wood is a natural material. Variation in color and grain pattern are to be expected.  
For more information or to place an order, please contact your [local TerraMai Rep.](#)



<b>SKU</b>	394
<b>Finish Option</b>	Unfinished
<b>Face Width</b>	5-1/8" (130mm)



<b>SKU</b>	627
<b>Finish Option</b>	Clear Oil
<b>Face Width</b>	5-1/8" (130mm)

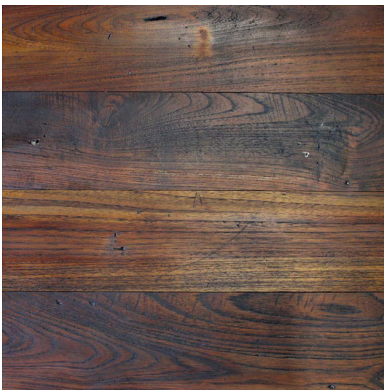

<b>SKU</b>	1183
<b>Finish Option</b>	Black Oil
<b>Face Width</b>	5-1/8" (130mm)

Species	<i>Tectona grandis</i>
Source	Reclaimed from vintage structures in Southeast Asia.
Character	Unfilled nail and other holes up to 6 mm wide. Prefilled nail and other holes over 6 mm. Oxide stains, saw trace marks, surface seasoning checks, occasional sound tight knots and other signs of prior history and age.
Finish*	Zero-VOC clear oil, low-VOC polyurethane, or unfinished
Thickness	9/16" (14mm)
Widths	5-1/8" (130mm)
Lengths	70-7/8" - 82-5/8" (1,800 - 2,099mm)
Construction	Engineered
Wear Layer	5/32" (4mm)
# of Backer Plies	7
Filler	Sawdust & Epoxy
Janka/Hardness	1,070 lbs (4.8 kN)
Moisture Content	6%-9%
Knots	Prefilled surface seasoning checks and occasional sound tight knots, oxide stains
Nail Holes	Prefilled nail and other holes
Saw Marks	Some trace marks
Grain	Mixed Grain
Density	41 lbs/ft <sup>3</sup> (657 kg/m <sup>3</sup> )
Packaging	Boxed <ul style="list-style-type: none"> <li>• 17.63 square feet per box</li> </ul>

\*Custom finishes available.

For more information on installation guidelines, please visit [TerraMai.com](https://TerraMai.com) and see [Flooring Installation Instructions](#) or [Paneling Installation Instructions](#).

## CERTIFICATIONS



FSC Mix 100% - FSC-C021798



VOC Reduction - Feature 4  
Toxic Material Reduction - Feature 25

## CONTRIBUTES TO TO LEED® V4

EQ Credit: Low-Emitting Materials - Flooring  
(1-3 Points)