

TerraMai's Long Plank Teak Flooring & Paneling is reclaimed from vintage structures in Southeast Asia and delivered in exceptionally long lengths (6' - 12'). Material is surfaced smooth for a more classic look, as featured here.

#### Allowed Application Areas

INTERIOR			EXTERIOR	
Floors	Walls	Ceilings	Siding	Decking
Yes	Yes	Yes	No	No

#### Approved Installation Methods

- Nail/Staple/Cleat
- Glue & Nail (100% moisture-curing polyurethane or silane-modified polymer - AXIOS or MS-Polymer)

#### Acclimation

The planks should be stored in a clean, dry, controlled environment between 60°F (16°C) and 80°F (27°C) and 35% to 55% RH, until the wood has achieved equilibrium moisture content. See the [TerraMai Flooring/Paneling Acclimation Instructions](#) for further information.

#### Options

Class A Flame Retardant

#### Profile


S4S - T&G, Square Edge



# TERRAMAI

SURFACED LONG PLANK TEAK  
*SOLID*  
FLOORING & PANELING

Wood is a natural material. Variation in color and grain pattern are to be expected.  
For more information or to place an order, please contact your [local TerraMai Rep.](#)

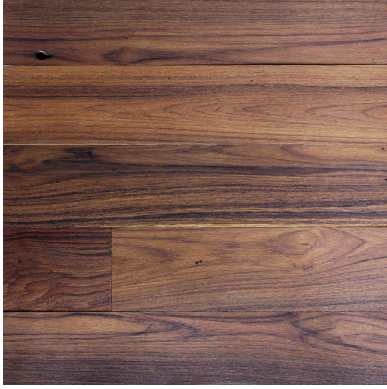

SKU	604
Finish Option	Unfinished
Face Width	5" (127mm)

Species	<i>Tectona grandis</i>
Source	Vintage structures from Southeast Asia
Character	Naturally distressed patina along with prefilled nail, bolt, or other holes, saw marks, dents, scratches, surface checking, oxide stains, and other signs of prior use and age. All through holes filled with black epoxy and/or teak.
Finish*	Zero-VOC clear oil, low-VOC polyurethane, or unfinished
Thickness	1/2" (13mm)
Width	5" (127mm)
Lengths	6' - 12' (1,829mm - 3,658mm)
Construction	Solid
Wear Layer	3/16" (5mm)
# of Backer Plies	N/A
Filler	Black Epoxy
Janka/Hardness	1,070 lbs (4.8 kN)
Moisture Content	6%-9%
Knots	Surface checking, oxide stains, and other signs of prior use and age.
Nail Holes	Prefilled nail, bolt, or other holes
Saw Marks	Yes
Grain	Mixed Grain
Density	41 lbs/ft <sup>3</sup> (656.8 kg/m <sup>3</sup> )
Packaging	Palletized

\*Custom finishes available.

For more information on installation guidelines, please visit [TerraMai.com](https://www.terramai.com) and see [Flooring Installation Instructions](#) or [Paneling Installation Instructions](#).

## CERTIFICATIONS



FSC Recycled 100% - FSC-C021798



HPD Certified



VOC Reduction - Feature 4  
 Toxic Material Reduction - Feature 25

## CONTRIBUTES TO LEED® V4

EQ Credit: Low-Emitting Materials - Flooring  
 (1-3 Points)

MR Credit: Building Life-Cycle Impact Reduction, Option 3  
 (2-5 Points)