



TerraMai is excited to introduce our line of Purpleheart flooring and paneling. A high performance, environmentally awesome, and budget appropriate tropical hardwood that offers excellent durability and rich tones.

TerraMai Water Reclaimed™ woods have been lying perfectly preserved but submerged for decades in reservoirs created by hydroelectric damming of rivers in the tropics. We are carefully removing, drying, and milling this lost and forgotten resource as an environmentally viable tropical hardwood siding and decking option.

Allowed Application Areas

INTERIOR			EXTERIOR	
Floors	Walls	Ceilings	Siding	Decking
No	Yes	Yes	Yes	No

Approved Installation Methods

- Nail/Staple/Cleat
- Glue & Nail (100% moisture-curing polyurethane or silane-modified polymer - AXIOS or MS-Polymer)

Acclimation

For interior applications, the planks should be stored in a clean, dry, controlled environment between 60°F (16°C) and 80°F (27°C) and 35% to 55% RH, until the wood has achieved equilibrium moisture content. See the [TerraMai Flooring/Paneling Acclimation Instructions](#) for further information. For exterior siding applications, acclimate per the [TerraMai Siding & Decking Acclimation Guide](#).

Options

Class A Flame Retardant

Profile


Shiplap 2.0, Square Edge



TERRAMAI

WATER RECLAIMED™
PURPLEHEART SHIPLAP 2.0
SOLID
PANELING

Wood is a natural material. Variation in color and grain pattern are to be expected.
For more information or to place an order, please contact your [local TerraMai Rep.](#)

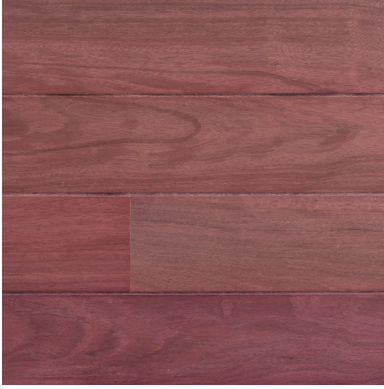

SKU	981
Finish Option	Clear Oil
Face Width	4-1/2" (114mm)

TERRAMAI

WATER RECLAIMED™
PURPLEHEART SHIPLAP 2.0
SOLID
PANELING

Species	<i>Peltogyne paniculata</i>
Source	Reclaimed from reservoirs in the tropics.
Character	Very clean with an occasional pin knot. Will patina to dark brown/purple with UV light exposure.
Finish*	Zero-VOC clear oil, low-VOC polyurethane, or unfinished
Thickness	5/8" (16mm)
Width	4-1/2" (114mm)
Lengths	2' - 8' (610mm - 2438mm)
Construction	Solid
Wear Layer	0
# of Backer Plies	N/A
Filler	N/A
Janka/Hardness	2,520 lbs (11.2 kN)
Moisture Content	6%-9%
Knots	Very occasional small and sound tight knots
Nail Holes	No
Saw Marks	No
Grain	Mixed Grain
Density	56 lbs/ft ³ (897 kg/m ³)
Packaging	Palletized

*Custom finishes available.

For more information on installation guidelines, please visit [TerraMai.com](https://www.terramai.com) and see [Flooring Installation Instructions](#) or [Paneling Installation Instructions](#).

CERTIFICATIONS

TERRAMAI Water Reclaimed™

CONTRIBUTES TO LEED® V4

EQ Credit: Low-Emitting Materials - Flooring
(1-3 Points)