

BEAUTY & SPEED:

- **FAST & SIMPLE INSTALLATION** - Prefabricated modular panels allow the installation team to quickly complete jobs
- **MULTIPLE STYLES** - Plank, 3D Cube, 3D Stick, Chevron, Slats, and Board & Batten.
- **CUSTOM CAPABILITIES** - Our in-house craftspeople and state of the art equipment will bring your vision to life

Create spaces of unsurpassed beauty and character with TerraMai Modular Panels; reclaimed and sustainable wood on an FSC-certified plywood backer. Installation is quick, easy, and stays true to your design intent. Our modular panels will dramatically reduce your installation time for faster project completion.

Approved Application Areas

INTERIOR			EXTERIOR	
Floors	Walls	Ceilings	Siding	Decking
No	Yes	Yes	No	No

Approved Installation Methods

- Z-Clip (Walls)
- Adhesive with nailing (Walls)
- Approved mechanical fasteners connecting to structural members (Ceilings - Consult local building code)

Acclimation


TerraMai Modular Panels are constructed of natural, reclaimed wood assembled on 1/2" thick birch plywood. The panels should be stored in a clean, dry, controlled environment between 60°F (16°C) and 80°F (27°C) and 35% to 55% RH, until the wood moisture content has achieved equilibrium.

Options

Class A Flame Retardant

TERRAMAI

3D CUBE MODULAR PANELS

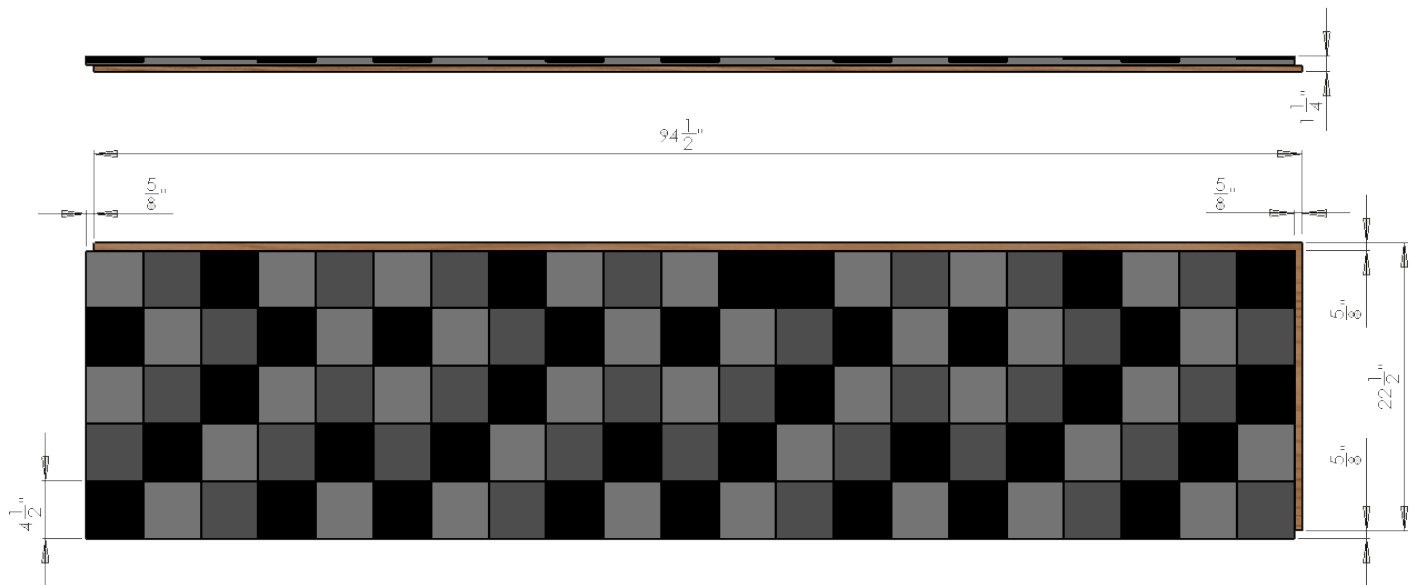

		Acacia	Angelique	Doug Fir	Red Oak	White Oak	Lost Coast Redwood	Teak
Total panel Weight	(lbs)	52	54	42	50	52	39	48
	(kg)	24	24	19	23	24	18	22
Weight per Area	(lbs/ft ²)	3.5	3.7	2.8	3.4	3.5	2.6	3.3
	(kg/m ²)	17	18	14	17	17	13	16
FSC % Mix	FSC C021798	49%	49%	49%	100%	100%	100%	100%
LEED v4 Contribution	EQ Credit - Low-Emitting Materials	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	MR Credit - Recycled Content	No	No	No	Yes	Yes	Yes	Yes

Wood is a natural material, and color and grain patterns will vary from piece to piece.

The black squares in the above image show the deepest squares; 1/4" deeper than the gray squares and 1/2" deeper than the white squares. The colors are not representative of the color of the wood.

Visit [TerraMai.com](https://www.terramai.com) for information on Modular Panels Installation Instructions and other modular panel configuration options.

SKU

Species	Unfinished	Prefinished*
Acacia	1089	1111
Angelique	1090	1112
Doug Fir	1086	1113
Oak, Red	1091	1115
Oak, White	1092	1117
Lost Coast Redwood	1093	1114
Teak	1094	1116

* Oil or Polyurethane to be specified on order. Customer finishes are available.

Available Species*	Acacia, Angelique, Doug Fir, Oak (Red and White), Redwood (Lost Coast), Teak
Finish Options*	Zero-VOC clear oil, low-VOC polyurethane, or unfinished
Panel Thickness*	1-1/4" (32 mm)
Width*	22-1/2" (572 mm)
Lengths*	90" (2286 mm)
Construction*	4-1/2" x 4-1/2" squares installed on 1/2" FSC Certified plywood
Plywood	1/2" FSC Certified 5-ply Birch plywood
Moisture Content	6-8%
Packaging	Crated
Installation on Walls	Glue & nail or Z-Clip
Ceiling Installation**	Approved mechanical fasteners attaching to structural members
Samples*	9" x 11-3/16" in Doug Fir

*Custom finishes, sizes and species available.

** Consult engineer with working knowledge of local building codes.